

Data approximation by L^1 spline fits with free knots [☆]

Ziteng Wang ^{a,*}, Manfei Xie ^b

^a Department of Industrial and Systems Engineering, College of Engineering and Engineering Technology, Northern Illinois University, 590 Garden Road, DeKalb, IL 60115, USA

^b Department of Information Systems, Statistics, and Management Science, Culverhouse College of Business, The University of Alabama, 361 Stadium Dr, Tuscaloosa, AL 35487, USA



ARTICLE INFO

Article history:

Received 15 July 2020

Received in revised form 1 July 2021

Accepted 22 December 2021

Available online 28 December 2021

Keywords:

Spline

Knot

Approximation

Optimization

Data science

ABSTRACT

L^1 spline fits are a class of spline models that have shown advantages in approximating irregular and multiscale data. This paper investigates the knot placement problem of L^1 spline fits under two scenarios. If the number of knots is given, we propose an augmented Lagrangian method to solve the bilevel L^1 spline fit problem and consequently, optimize the knot locations. In addition, if the knot number is also free, we propose a heuristic method to adaptively determine the knot number and locations. Numerical experiments show that L^1 spline fits with free knots can better approximate data than L^1 spline fits with pre-specified knots while requiring fewer knots and less input from the user. Comparison with state-of-the-art least square B-spline models shows that L^1 spline fits can approximate data with comparable squared error and significantly smaller absolute error.

© 2021 Elsevier B.V. All rights reserved.

1. Introduction

L^1 splines are a series of data interpolation and approximation models that are defined by minimization of various L^1 -norm based functionals on spline functions. For example, L^1 interpolating splines minimize the L^1 energy functional which is the L^1 -norm counterpart of the thin-plate energy functional commonly used in defining classical interpolating splines (Lavery, 2000b, 2001). L^1 smoothing splines and L^1 spline fits are two types of approximating splines that replace the squared error by the absolute deviation (l^1 norm) as the data-fitting metric (Lavery, 2000a, 2004). The use of these L^1 -norm based minimization principles offers L^1 splines the advantages of being free from extraneous oscillation and better preserving linearity, convexity and other geometric shapes in data (Wang et al., 2015; Nie et al., 2017). Consequently, L^1 splines are highly capable of modeling noisy, irregular and multiscale data which has abrupt changes in magnitude, direction and/or spacing. Applications of L^1 splines and similar L^1 -norm based spline models include scattered data interpolation and approximation (Lai and Weston, 2004), urban and natural terrain reconstruction (Bulatov and Lavery, 2010; Lin et al., 2006), financial data modeling (Chiu et al., 2008), robot control (Olabi et al., 2010), and image processing (Dobrev et al., 2010; Nyiri et al., 2010; Gajny et al., 2014), among others.

Data approximation by L^1 splines can be carried out by using L^1 spline fits. An L^1 spline fit is defined by minimizing an L^1 data fitting functional over the set of L^1 interpolating splines (formal definition in Section 3). Dependent on

[☆] Editor: Ulrich Reif.

* Corresponding author.

E-mail addresses: zwang3@niu.edu (Z. Wang), mxie12@crimson.ua.edu (M. Xie).

the order of spline derivative involved in the L^1 interpolating functional, there are three types of spline fits which are second-derivative based, first-derivative based and function-value based, respectively (Lavery, 2006, 2009). In this paper, we investigate second-derivative based univariate cubic L^1 spline fits, which will be referred to as L^1 spline fits hereafter unless otherwise specified. Other variants of L^1 spline fits are out of the scope and will be studied in the future.

We need three sets of parameters to specify a cubic spline: knots (including the number of knots and their locations), function values at the knots and first derivatives at the knots. Existing literature on L^1 spline fits treats knots as given and seeks the function values and associated first derivatives by solving a bilevel nonlinear programming problem. The upper level of the bilevel problem minimizes the L^1 data approximation error by choosing proper function values with associated first derivatives calculated by minimization of the L^1 interpolating functional in the lower level. Lavery (2004) develops an interior-point computational method with discretization of the objective functions. Wang et al. (2014) reformulate the bilevel problem as a nonlinear program by applying the recently developed 5-knot sliding window algorithm for minimizing the L^1 interpolating functional (Jin et al., 2010), and thus gradient methods can be used. However, not allowing knots to freely move limits the approximating power of L^1 spline fits.

In this paper, we treat the knots as free variables. That is, we approximate data by using L^1 spline fits with free knots. By freeing the knots we increase the modeling capability and flexibility of L^1 spline fits. Two scenarios in this regard are investigated. First, if the number of knots is pre-specified, we propose an augmented Lagrangian method to solve the L^1 spline fit problem with the knot locations being part of the decision variables. Second, if the number of knots is also free, we propose a heuristic method to adaptively decide the knot number and locations. In both scenarios, function values and the first derivatives of the L^1 spline fits are also optimized. Numerical experiments show that the L^1 spline fits with free knots produce smaller approximation error than that with pre-specified knots. Comparison with state-of-the-art knot placement methods shows that L^1 spline fits can approximate data with comparable squared error and significantly smaller absolute error than least square B-splines.

The main contributions of this paper are as follows. To the best of our knowledge, this research is the first to specifically address the knot placement problem of L^1 splines. With free knots being optimized to suit the data approximation needs, the L^1 spline fits can better capture the shapes and trends in data and consequently, can provide more insights for any subsequent data analysis and mining. Furthermore, this research increases the usability of L^1 splines. User input of knot number and locations will no longer be required, which otherwise often demands problem-specific intelligence and experience.

The remainder of the paper is organized as follows. The next section reviews state-of-the-art methods of the knot placement problem for approximating splines. In Section 3, we provide the preliminaries about L^1 spline fits and define the L^1 spline fit optimization problem with free knots. In Section 4, we propose an augmented Lagrangian method for knot location optimization. In Section 5, we propose a heuristic method for determining the knot number. Numerical experiments are provided in Section 6. Section 7 concludes the paper.

2. Related literature

To the best of our knowledge, this paper is the first study that specifically addresses the knot placement problem for L^1 splines. Nevertheless, there exists an extensive body of literature on knot placement methods for least square data approximation by B-splines. Despite the difference in definition from L^1 spline fits, the knot location selection methods for approximating B-splines are closely relevant and are therefore reviewed in this section.

A common strategy of knot placement is to choose knots from the data points. Plass and Stone (1983) use a dynamic programming scheme to reduce the complexity of enumerating all data points. Lyche and Mørken (1988) assess the impact of each data point, if chosen as knot, on the overall approximation performance, and remove the unimportant ones. Some heuristic methods select knots from data points based on their geometric features. For example, Li et al. (2005) consider the discrete curvature of the data points and place knots with respect to the integration of the smoothed curvature to satisfy a heuristic rule. Park and Lee (2007) select knots from “dominant points” which are local curvature maximum points. Laube et al. (2018) develop support vector machine method which considers multiple features including curvature, angle and distance to neighbors. Yeh et al. (2020) select the knots by evenly distributing the “geometric feature contents” based on estimated derivatives of a certain order. The limitation of this strategy is that knots must be data points and not completely free. Such methods often have to rely on heuristic rules.

Another knot placement strategy is to generate a dense knot vector and then remove the redundant ones by certain criteria. Afterwards, the knots are often further adjusted and consolidated by some heuristic methods. Tjahjowidodo et al. (2015) iteratively bisect the data and use piecewise linear functions to fit the second derivatives. The break points of the piecewise linear functions are considered as candidates of knot locations. In a subsequent study, Dung and Tjahjowidodo (2017) adapt a similar bisecting method while directly fitting the subsets of data by B-splines to identify candidate knot locations. Noticing the discontinuity of the third derivative of cubic splines at the “active” knots, Van Look et al. (2011) minimize the l^1 norm of the “jumps” of the third order derivative, and choose knot locations by the optimal sparse solution. Kang et al. (2015) further reduce the redundant knots without decreasing the approximation quality. Luo et al. (2019) propose additional criteria to keep knots with local maximum jumps and filter out knots with small jumps. Brandt et al. (2015) directly tackle the l^0 norm of the jumps and improve the knot selection quality. Yuan et al. (2013) form an extensive set of multi-resolution basis functions and use Lasso to select a sparse subset and their respective knots.

Optimization methods are among the first and current knot placement techniques. Jupp (1978) formulates the least square B-spline approximation problem with free knots as a nonlinear programming problem. The problem is then transformed to an unconstrained problem and is solved by Gauss-Newton method. Schwetlick and Schütze (1995) solve the linearly constrained nonlinear programming problem directly to avoid the quality loss due to back transformation in Jupp (1978). However, these optimization methods only find local optimum and do not guarantee global optimality. Beliaikov (2004) employs the cutting angle method to find the global optimum. Metaheuristic optimization methods also have been applied to solve the knot placement optimization models. Examples include genetic algorithm (Yoshimoto et al., 1999, 2003), artificial immune system method (Ülker and Arslan, 2009), particle swarm optimization (Gálvez and Iglesias, 2011) and elitist clonal selection algorithm (Gálvez et al., 2015).

In this research, we propose an augmented Lagrangian method to optimize the knot locations when the number of knots is given a priori. This method directly solves the L^1 spline fits problem with knots being treated as variables and therefore, reducing the data approximation error remains the primary objective. Furthermore, the augmented Lagrangian method can incorporate the 5-knot sliding window algorithm which allows the bilevel L^1 spline fit problem to be reformulated as a nonlinear programming problem. Consequently, the subgradients of the L^1 data approximation error with respect to knots can be efficiently computed. Numerical experiments show that with carefully chosen initial knot locations and function values, the proposed method produces L^1 spline fits that can well approximate given data. Inspired by the success of the augmented Lagrangian method, we propose an optimization-based heuristic method for determining knot number and locations.

3. L^1 spline fits with free knots

Let the data to be approximated be $\{(\hat{x}_m, \hat{z}_m)\}_{m=1}^M$ with $\hat{x}_1 \leq \hat{x}_2 \leq \dots \leq \hat{x}_M$. We consider C^1 -smooth piecewise cubic polynomials $z(x)$ as the data approximation model. To define $z(x)$, three sets of parameters are needed: knots $\mathbf{x} = (x_0, x_1, \dots, x_I)$, $I \geq 1$, $x_0 < x_1 < \dots < x_I$, function values $\mathbf{z} = (z_0, z_1, \dots, z_I)$ and first derivatives $\mathbf{b} = (b_0, b_1, \dots, b_I)$ at the knots. That is, $z_i = z(x_i)$ and $b_i = \frac{dz}{dx}(x_i)$, $i = 0, 1, \dots, I$. We can easily derive that $z(x)$ takes the form

$$z(x; \mathbf{z}, \mathbf{b}) = z_i + b_i(x - x_i) + \frac{1}{h_i} [-(2b_i + b_{i+1}) + 3\Delta z_i] (x - x_i)^2 + \frac{1}{h_i^2} [b_i + b_{i+1} - 2\Delta z_i] (x - x_i)^3 \quad (1)$$

in each interval $[x_i, x_{i+1}]$, $i = 0, 1, \dots, I-1$, where $h_i = x_{i+1} - x_i$ and $\Delta z_i = \frac{z_{i+1} - z_i}{h_i}$. To ensure that all data points are in the interval $[x_0, x_I]$, we set $x_0 = \hat{x}_1$ and $x_I = \hat{x}_M$ without loss of generality. Furthermore, to avoid unnecessary overshooting due to lack of data points in any interval $[x_i, x_{i+1}]$, we assume that $x_{i+1} - x_i \geq \delta$, $\forall i$, where $\delta = \min\{\hat{x}_{m+1} - \hat{x}_m, m = 1, \dots, M-1\}$ denotes the minimal gap between x -parameter of two consecutive data points.

An L^1 spline fit is a function $z(x)$ of form (1) that minimizes the l^1 -norm of the approximation error

$$f(\mathbf{x}, \mathbf{z}, \mathbf{b}) := \sum_{m=1}^M |z(\hat{x}_m; \mathbf{z}, \mathbf{b}) - \hat{z}_m|$$

over the set of L^1 interpolating splines. An L^1 interpolating spline with given knots $\mathbf{x}$ and function values $\mathbf{z}$ is defined to have such $\mathbf{b}$ that minimizes the (second-derivative based) L^1 interpolating functional

$$\int_{x_0}^{x_I} \left| \frac{d^2 z}{dx^2} \right| dx.$$

Therefore, with $\mathbf{x}$ and $\mathbf{z}$ being free parameters and $\mathbf{b}$ dependent on $\mathbf{x}$ and $\mathbf{z}$, the L^1 spline fit problem with free knots can be formulated as the following bi-level optimization model:

$$\begin{aligned} \min_{\mathbf{x}, \mathbf{z}} \quad & f(\mathbf{x}, \mathbf{z}, \mathbf{b}) \\ \text{s.t.} \quad & u_i(\mathbf{x}) := x_{i+1} - x_i - \delta \geq 0, \quad i = 0, 1, \dots, I-1 \\ & \mathbf{b} = \arg \min_{\mathbf{b}} \int_{x_0}^{x_I} \left| \frac{d^2 z}{dx^2} \right| dx. \end{aligned} \quad (2)$$

Note that the first knot x_0 and the last knot x_I are fixed to be $\hat{x}_1$ and $\hat{x}_M$, respectively. Instead of explicitly including $x_0 = \hat{x}_1$ and $x_I = \hat{x}_M$ as constraints, we continue to use $\mathbf{x}$ to denote the decision variables $(x_2, x_3, \dots, x_{I-1})$ in model (2) with a slight abuse of notation. This model extends the one in Wang et al. (2014) which minimizes $\sum_{m=1}^M |z(\hat{x}_m; \mathbf{z}, \mathbf{b}) - \hat{z}_m|$ over $\mathbf{z}$ with given knot locations $\mathbf{x}$.

4. Knot location optimization method

In this section we propose an augmented Lagrangian method to solve the L^1 spline fit with free knots problem (2) with the number of knots being given. The first key step is to convert the bilevel problem (2) to a (single level) nonlinear programming problem. For this purpose, we employ the analytic solution $\mathbf{b} = \mathbf{b}(\mathbf{x}, \mathbf{z})$ to minimization of $\int_{x_0}^{x_l} \left| \frac{d^2 z}{dx^2} \right| dx$ that is derived in the 5-knot sliding window algorithm by Jin et al. (2010). The existence and uniqueness of $\mathbf{b}$ are addressed in Lavery (2000b), Lai and Wenston (2004), Jin et al. (2010) and Yu et al. (2010). The 5-knot sliding window algorithm is an analysis-based computational scheme for L^1 interpolating splines. The algorithm calculates the first derivative at each knot solely based on the knots and function values in the 5-knot local window to which the knot of interest is the center. This idea utilizes the piecewise nature of splines and excludes the complexity caused by less relevant regions, with negligible information loss. Consequently, a closed-form analytic solution $\mathbf{b} = \mathbf{b}(\mathbf{x}, \mathbf{z})$ can be derived, which drastically reduces computing time and enables parallel computation. Furthermore, the L^1 interpolating splines computed by the 5-knot sliding window algorithm have shown enhanced shape preservation results (Yu et al., 2010). By denoting $F(\mathbf{x}, \mathbf{z}) := f(\mathbf{x}, \mathbf{z}, \mathbf{b}(\mathbf{x}, \mathbf{z}))$ and adding slack variables $s_i, i = 0, 1, \dots, I-1$, we reformulate the model (2) as the following linearly constrained nonlinear programming problem

$$\begin{aligned} \min_{\mathbf{x}, \mathbf{z}} \quad & F(\mathbf{x}, \mathbf{z}) \\ \text{s.t.} \quad & v_i(\mathbf{x}, \mathbf{s}) := u_i(\mathbf{x}) - s_i^2 = 0, \quad i = 0, 1, \dots, I-1. \end{aligned} \quad (3)$$

The augmented Lagrangian function is defined as

$$\phi(\mathbf{x}, \mathbf{z}, \mathbf{s}; \mathbf{w}, \sigma) = F(\mathbf{x}, \mathbf{z}) - \sum_{i=0}^{I-1} w_i v_i(\mathbf{x}, \mathbf{s}) + \frac{\sigma}{2} \sum_{i=0}^{I-1} v_i(\mathbf{x}, \mathbf{s})^2 \quad (4)$$

where $\mathbf{w} = (w_0, w_1, \dots, w_{I-1})$ are the multipliers and σ is the penalty factor. For any fixed σ , define the dual function in $\mathbf{w}$ as

$$\varphi(\mathbf{w}; \sigma) = \min_{\mathbf{x}, \mathbf{z}, \mathbf{s}} \phi(\mathbf{x}, \mathbf{z}, \mathbf{s}; \mathbf{w}, \sigma).$$

Note that it is easy to find the closed-form

$$s_i^2 = \frac{1}{\sigma} \max\{0, \sigma u_i(\mathbf{x}) - w_i\}, \quad i = 0, 1, \dots, I-1, \quad (5)$$

that minimizes $\phi(\mathbf{x}, \mathbf{z}, \mathbf{s}; \mathbf{w}, \sigma)$ with respect to $\mathbf{s}$ for given $\mathbf{x}$ and $\mathbf{z}$. Therefore, substituting (5) in (4), we have

$$\Phi(\mathbf{x}, \mathbf{z}; \mathbf{w}, \sigma) = F(\mathbf{x}, \mathbf{z}) + \frac{1}{2\sigma} \sum_{i=0}^{I-1} \{[\max\{0, w_i - \sigma u_i(\mathbf{x})\}]^2 - (w_i)^2\}$$

and

$$\varphi(\mathbf{w}; \sigma) = \min_{\mathbf{x}, \mathbf{z}} \Phi(\mathbf{x}, \mathbf{z}; \mathbf{w}, \sigma).$$

By the theory of augmented Lagrangian method (e.g., Luenberger and Ye (2015)), for a sufficiently large σ , if $\mathbf{w}^*$ maximizes $\varphi(\mathbf{w}; \sigma)$ and $(\mathbf{x}^*(\mathbf{w}^*), \mathbf{z}^*(\mathbf{w}^*))$ minimizes $\Phi(\mathbf{x}, \mathbf{z}; \mathbf{w}^*, \sigma)$, then $(\mathbf{x}^*(\mathbf{w}^*), \mathbf{z}^*(\mathbf{w}^*))$ is a local optimal solution to problem (3).

We use the subgradient method to minimize $\Phi(\mathbf{x}, \mathbf{z}; \mathbf{w}, \sigma)$ due to the nonsmoothness of $f(\mathbf{x}, \mathbf{z}, \mathbf{b})$, $\mathbf{b}(\mathbf{x}, \mathbf{z})$ and the $\max\{\cdot\}$ operator. The subgradients are calculated by

$$\frac{\partial \Phi}{\partial x_i} = \frac{\partial f}{\partial x_i} + \sum_{i'=0}^I \frac{\partial f}{\partial b_{i'}} \frac{\partial b_{i'}}{\partial x_i} + \max\{0, w_i - \sigma u_i\} - \max\{0, w_{i-1} - \sigma u_{i-1}\}$$

and

$$\frac{\partial \Phi}{\partial z_i} = \frac{\partial f}{\partial z_i} + \sum_{i'=0}^I \frac{\partial f}{\partial b_{i'}} \frac{\partial b_{i'}}{\partial z_i}$$

for $i = 0, 1, \dots, I$. The explicit forms of $\frac{\partial b_{i'}}{\partial x_i}$ and $\frac{\partial b_{i'}}{\partial z_i}$ are too complicated to be shown here but are available in Jin et al. (2010). For variants and implementation of subgradient methods please refer to Bazaraa et al. (2013) and references therein.

In each iteration of the augmented Lagrangian method, the multipliers $\mathbf{w}$ are updated in each iteration by the following gradient search step:

$$w_i^{(k+1)} = \max(0, w_i^{(k)} - \sigma u_i(\mathbf{x}^{(k)})).$$

For convergence purpose, we update σ by $\alpha\sigma$ if $\frac{\|\mathbf{w}^{(k)} - \mathbf{w}^{(k-1)}\|}{\|\mathbf{w}^{(k-1)} - \mathbf{w}^{(k-2)}\|} > \beta$ where $\alpha > 1$ and $\beta > 0$.

The proposed method is summarized in Algorithm 1.

Algorithm 1: Knot Location Optimization Method (KLOM).

Input: $\{\hat{x}_m, \hat{z}_m\}$
Output: $\mathbf{x}^*, \mathbf{z}^*, \mathbf{b}^*$
1 **Initialization:** $\mathbf{x}^{(0)}, \mathbf{z}^{(0)}, \mathbf{w}^{(0)}, \sigma, \alpha > 1, \beta > 0, \epsilon > 0$;
2 Set $flag = 0, k = 0$;
3 **while** $flag < 1$ **do**
4 Solve problem (3) by the subgradient method for $\mathbf{x}^{(k)}, \mathbf{z}^{(k)}, \mathbf{b}^{(k)}$;
5 **if** $\|\mathbf{v}(\mathbf{x}^{(k)}, \mathbf{s})\| < \epsilon$ **then**
6 $flag = 1$;
7 $(\mathbf{x}^*, \mathbf{z}^*, \mathbf{b}^*) = (\mathbf{x}^{(k)}, \mathbf{z}^{(k)}, \mathbf{b}^{(k)})$;
8 **else**
9 **if** $\frac{\|\mathbf{w}^{(k)} - \mathbf{w}^{(k-1)}\|}{\|\mathbf{w}^{(k-1)} - \mathbf{w}^{(k-2)}\|} > \beta$ **then**
10 $\sigma = \alpha\sigma$;
11 **end**
12 $w_i^{(k+1)} = \max(0, w_i^{(k)} - \sigma u_i(\mathbf{x}^{(k)}))$;
13 $k = k + 1$;
14 **end**
15 **end**

5. Knot number heuristic method

When the number of knots is not known or specified before data fitting, we have to determine the number of knots and their locations. Knot number determination is a fairly challenging problem because on one hand, the ideal result is to well approximate the data by using as few knots as one can, while on the other hand, the reality is that using fewer knots sacrifices the fitting performance and using more knots increases the risk of over-fitting. Hence, researchers and practitioners have to seek heuristic methods based on the context of application or inspired by features of the data.

In this section, we propose a new heuristic method to tackle the task of determining the number and locations of the knots. The method is inspired by the insight that the distance a given knot is moved by the knot location optimization method indicates its significance in reducing the approximation error. Therefore, we propose the following iterative procedure:

Start with equidistant knots $\mathbf{x}^{(0)} = \{x_0^{(0)}, x_1^{(0)}, \dots, x_{l_0}^{(0)}\}$ with l_0 being a small integer, $x_0^{(0)} = \hat{x}_1$ and $x_{l_0}^{(0)} = \hat{x}_M$. Optimize $\mathbf{x}^{(0)}$ by Algorithm 1 and the new locations are denoted by $\mathbf{x}^{(*,0)}$. Calculate the location change of each knot $\Delta_i = |x_i^{(*,0)} - x_i^{(0)}|$ and find the knot with the largest change: $i_{\max} = \arg \max_i \Delta_i$. We construct $\mathbf{x}^{(1)}$ for next iteration by adding $x_{i_{\max}}^{(*,0)}$ as a new knot, redistributing $x_1^{(0)}, \dots, x_{i_{\max}-1}^{(0)}$ equidistantly in $[\hat{x}_1, x_{i_{\max}}^{(*,0)})$ and redistributing $x_{i_{\max}+1}^{(0)}, \dots, x_{l_0-1}^{(0)}$ equidistantly in $[x_{i_{\max}}^{(*,0)}, \hat{x}_M]$. Re-optimize $\mathbf{x}^{(1)}$ and repeat the process above. Note that this iterative process does not guarantee that the L^1 approximation error strictly decreases in each iteration. Therefore, we keep record of the lowest approximation error ever achieved, and terminate the procedure if the lowest approximation error has remained constant for a certain number of iterations. Formally, the proposed method is summarized in Algorithm 2. Fig. 1 illustrates the first iteration of the algorithm.

We note that a limitation of the proposed heuristic method is that it does not ensure the L^1 approximation error will decrease over each iteration. This is because KLOM algorithm finds a local optimum to the highly non-convex problem (2). Nevertheless, in the experiments we have conducted, the heuristic method still produces an overall decreasing trend in the L^1 approximation error when more and more knots are added. This is because, intuitively, more knots grant more approximating power to the L^1 spline.

6. Experiments

6.1. Benchmark data sets for L^1 splines

We approximate three benchmark data sets by the proposed L^1 spline fits with free knots and compare the results with that in Wang et al. (2014) which take knot locations as given. These data sets represent common shapes in multiscale data and have been used in multiple experiments of L^1 splines (Lavery, 2000a, 2004; Wang et al., 2014). Data set 1 represents a plateau with discontinuity between three linear segments. Data set 2 contains discontinuous flat portions, linear ramps and an outlier. Data set 3 is a cross section of 100-meter-posting terrain elevation data for Ft. Hood, Texas (Lavery, 2001). Abrupt changes in magnitude and spacing are found in all three data sets and consequently, often result in extraneous oscillation

Algorithm 2: Knot Number Heuristic Method (KNHM).

Input: $\{\hat{x}_m, \hat{z}_m\}$
Output: $\mathbf{x}^*, \mathbf{z}^*, \mathbf{b}^*$

- 1 **Initialization:** $I_0 > 0$ integer, $\text{MaxNumNoChange} > 0$ integer;
- 2 Set $\text{flag} = 0, k = 0, f^{\text{best}} = \infty$;
- 3 Set $\mathbf{x}^{(0)}$: $x_0^{(0)} = \hat{x}_1, x_i^{(0)} = \frac{\hat{x}_M - \hat{x}_1}{I_0 - 1}, i = 1, \dots, I_0 - 1$, and $x_{I_0}^{(0)} = \hat{x}_M$;
- 4 **while** $\text{flag} < \text{MaxNumNoChange}$ **do**
- 5 Call Algorithm 1 to relocate $\mathbf{x}^{(k)}$ as $\mathbf{x}^{(*,k)}$ with output $\mathbf{z}^{(*,k)}, \mathbf{b}^{(*,k)}$ and approximation error $f^{(k)}$;
- 6 **if** $f^{(k)} < f^{\text{best}}$ **then**
- 7 $(\mathbf{x}^*, \mathbf{z}^*, \mathbf{b}^*) = (\mathbf{x}^{(*,k)}, \mathbf{z}^{(*,k)}, \mathbf{b}^{(*,k)})$;
- 8 $\text{flag} = 0$;
- 9 **else**
- 10 $\text{flag} = \text{flag} + 1$;
- 11 **end**
- 12 Find $i_{\max} = \arg \max_i |x_i^{(*,k)} - x_i^{(k)}|$;
- 13 Construct $\mathbf{x}^{(k+1)}$: Add $x_{i_{\max}}^{(*,k)}$ as a new knot; Redistribute $x_1^{(k)}, \dots, x_{i_{\max}-1}^{(k)}$ equidistantly in $[\hat{x}_1, x_{i_{\max}}^{(*,k)})$; Redistribute $x_{i_{\max}+1}^{(k)}, \dots, x_{I_k-1}^{(k)}$ equidistantly in $[x_{i_{\max}}^{(*,k)}, \hat{x}_M]$; Keep $x_0^{(k+1)} = \hat{x}_1$ and $x_{I_k+1}^{(k+1)} = \hat{x}_M$;
- 14 Set $I_{k+1} = I_k + 1$;
- 15 Set $k = k + 1$;
- 16 **end**

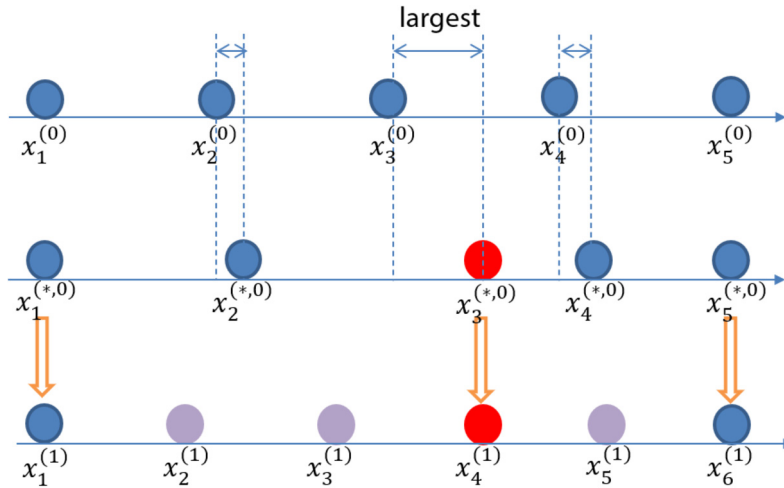


Fig. 1. Illustration of knot number heuristic method: The first iteration, starting with five knots.

and loss of shape preservation if approximated by conventional L^2 -norm based splines. However, L^1 spline fits can produce shape-preserving approximation of these data sets.

We feed the knot location optimization method (KLOM) with two settings of initial knot locations: $\mathbf{x}^1$ is the same as the given knots in Wang et al. (2014). $\mathbf{x}^2$ has the same knot number as $\mathbf{x}^1$ and better resembles the distribution of the data by having $x_0^2 = \hat{x}_1, x_i^2 = \hat{x}_{\lfloor \frac{M}{I} \rfloor}, i = 1, \dots, I - 1$, and $x_I^2 = \hat{x}_M$. In the knot number heuristic method (KNHM), we set $I_0 = \lceil 0.05M \rceil$ and terminate if the lowest observed approximation remains unchanged for 3 iterations. To ensure solution quality and convergence speed of the subgradient routine, we use the implementation as suggested in Camerini et al. (1975).

Table 1 shows the mean l^1 approximation error, also called mean absolute error (MAE), which is defined as $\text{MAE} = \frac{\sum_{m=1}^M |z(\hat{x}_m) - \hat{z}_m|}{M}$. The number of knots determined by KNHM is also compared with the pre-specified knot number in Wang et al. (2014). The results clearly show that L^1 spline fits with free knots, computed by both methods proposed in this paper, can better approximate data than that with fixed knots. Furthermore, the heuristic method uses fewer knots to achieve better approximation results. This implies that KNHM can place knots more economically than user-dependent pre-specification of knots.

The L^1 spline fits are plotted in Figs. 2, 3 and 4. The given data points are marked as circles and the knot locations are indicated by the triangles. We see that the L^1 spline fits with free knots better preserve shapes in data, for example, the linear shape in interval $[3, 4]$ of data set 1, the linear shapes in intervals $[3, 4]$, $[4, 5]$, $[7, 8]$ and $[8, 9]$ of data set 2, and the hill-like shape in interval $[2000, 3000]$ of data set 3. We also point out that the heuristic method places three knots in each of the linear segments of data set 1 which has been proven to be the minimum number of knots needed for linear shape preservation (Wang et al., 2015).

Table 1
Comparison of L^1 spline fits by different methods.

Data set	Experiment	No. of data points	No. of knots	MAE
1	Fixed knots $\mathbf{x}^1$	81	17	0.0494*
	KLOM + $\mathbf{x}^1$	81	17	0
	KLOM + $\mathbf{x}^2$	81	17	0
	KNHM	81	9	0
2	Fixed knots $\mathbf{x}^1$	117	17	0.123*
	KLOM + $\mathbf{x}^1$	117	17	0.0485
	KLOM + $\mathbf{x}^2$	117	17	0.0404
	KNHM	117	15	0.0134
3	Fixed knots $\mathbf{x}^1$	81	14	0.902*
	KLOM + $\mathbf{x}^1$	81	14	0.317
	KLOM + $\mathbf{x}^2$	81	14	0.258
	KNHM	81	13	0.235

* From Wang et al. (2014).

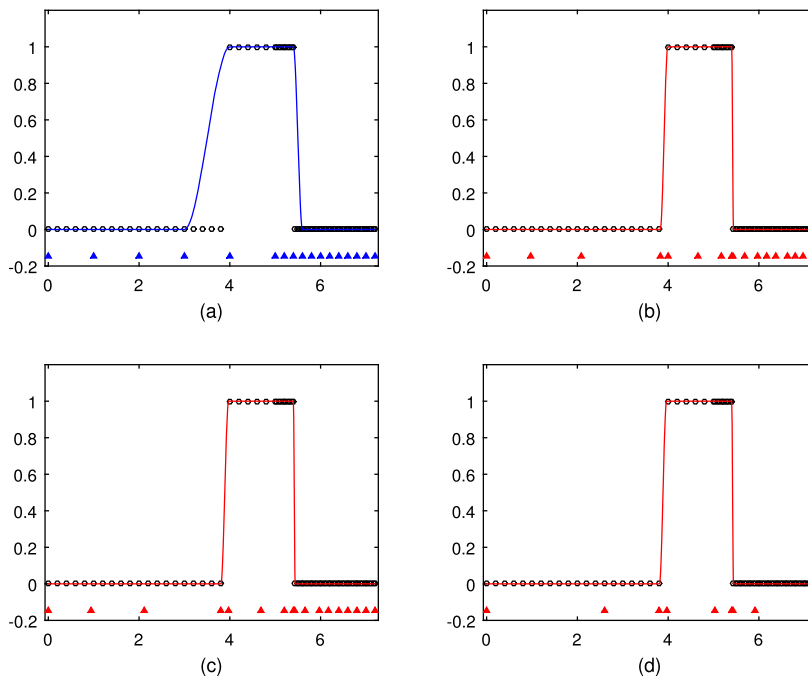


Fig. 2. L^1 spline fits for data set 1: (a) fixed knots (Wang et al., 2014); (b) KLOM with $\mathbf{x}^1$; (c) KLOM with $\mathbf{x}^2$; (d) KNHM. Blue and red triangles indicate the knot locations. Black circles are data points. (For interpretation of the colors in the figure(s), the reader is referred to the web version of this article.)

6.2. Titanium heat data

Titanium heat data was used by De Boor and Rice (1968) for spline fitting and has since become a classical test data set. The difficulty to approximate Titanium heat data is due to its sharp peak as depicted in Fig. 5. The data originally ranged from [595, 1075] and for consistency with common practice in literature, are linearly scaled to [0, 75] which has no effect on the optimal knot distribution.

We approximate the Titanium heat data by L^1 spline fits with the proposed knot number heuristic method (KNHM) and compare with other five studies, all of which address knot placement for least-square B-splines. Given knot number being five, De Boor and Rice (1968) and Jupp (1978) initialize their local optimization methods by a knot vector that is very close to the proved optimum, and Beliaikov (2004) develops a global optimization method to find the same optimum as Jupp (1978). With knot number being free, the Lasso-based heuristic method by Yuan et al. (2013) chooses 6 interior knots from a 8-level multi-resolution B-spline basis function set, while the sparse optimization-based heuristic methods in Kang et al. (2015) and Luo et al. (2019) both select 5 knots from 100 equidistant ones. In contrast, the proposed knot number heuristic method in this paper requires no dense knot vector as input and adaptively places new knots where the local optimization subroutine suggests.

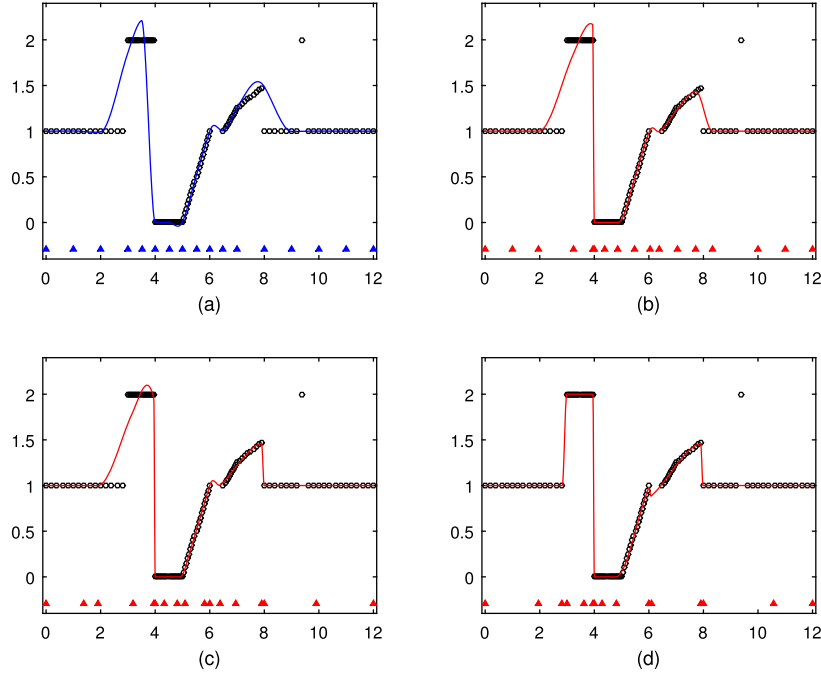


Fig. 3. L^1 spline fits for data set 2: (a) fixed knots (Wang et al., 2014); (b) KLOM with $\mathbf{x}^1$; (c) KLOM with $\mathbf{x}^2$; (d) KNHM. Blue and red triangles indicate the knot locations. Black circles are data points.

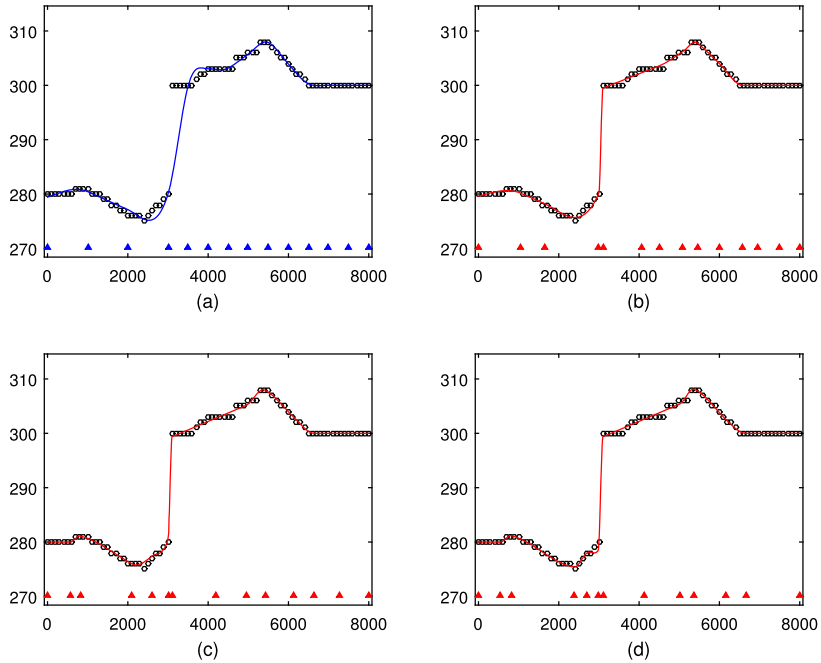


Fig. 4. L^1 spline fits for data set 3: (a) fixed knots (Wang et al., 2014); (b) KLOM with $\mathbf{x}^1$; (c) KLOM with $\mathbf{x}^2$; (d) KNHM. Blue and red triangles indicate the knot locations. Black circles are data points.

Fig. 6 shows that the L^1 spline fit accurately approximates the peak and other portions of the data. Table 2 lists the knot locations, the (l^2 -norm based) residual error and the (l^1 -norm based) mean absolute error of the approximating splines. The residual error (RE) has been used in literature on least square spline approximation of the Titanium heat data and is defined as:

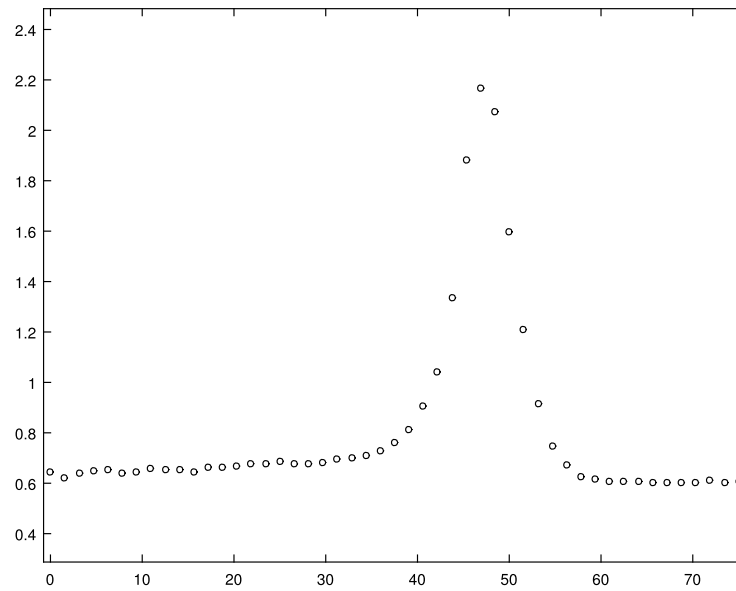


Fig. 5. Titanium heat data (De Boor and Rice, 1968).

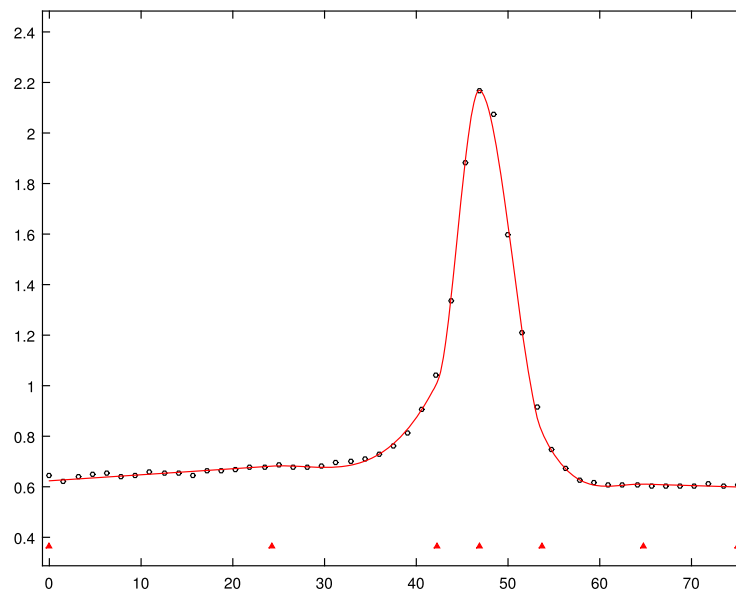


Fig. 6. L^1 spline fit for Titanium heat data. Red triangles indicate the knot locations. Black circles are data points.

Table 2

Comparison of approximating splines for Titanium heat data.

Method	Interior knots	RE	MAE
De Boor and Rice (1968)	(37.55, 43.99, 48.04, 49.29, 59.82)	0.0131	0.470
Jupp (1978)	(37.65, 43.97, 47.37, 50.12, 59.20)	0.0123	0.446
Beliakov (2004)	(37.65, 43.97, 47.37, 50.12, 59.20)	0.0123	0.446
Yuan et al. (2013)	(18.00, 39.34, 44.82, 46.61, 50.13, 58.33)	0.0177	0.588
Kang et al. (2015)	(38.41, 43.50, 47.04, 51.00, 58.09)	0.0141	0.507
Luo et al. (2019)	(38.14, 43.71, 47.25, 50.50, 57.92)	0.0133	0.503
KNHM	(24.24, 42.32, 46.94, 53.76, 64.77)	0.0153	0.00849

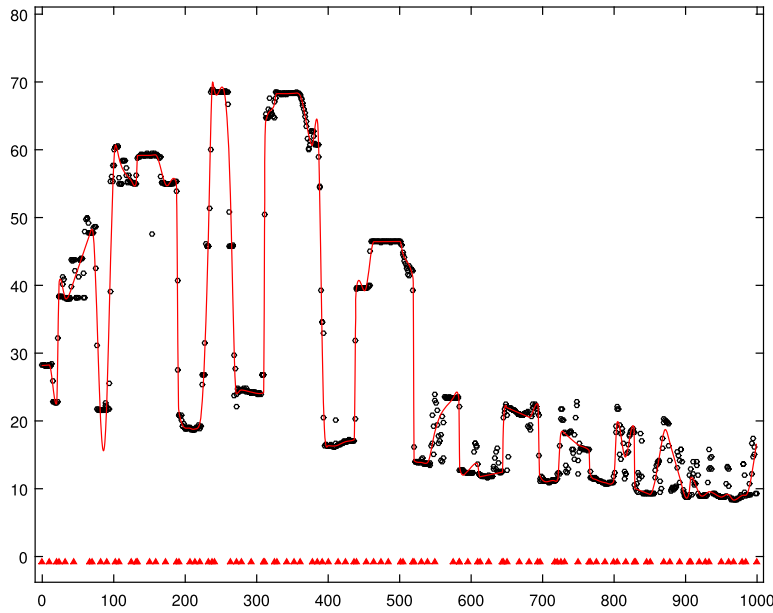


Fig. 7. One of the test data sets with a 100-knot L^1 spline fit. Red triangles indicate the knot locations. Black circles are data points.

Table 3

Computational time of KLOM.

Number of knots	20	40	60	80	100
Average time (sec.)	54.6	29.5	30.4	55.0	41.5
Average MAE	4342.0	2832.8	2045.9	1501.9	1331.9

$$RE = \sqrt{\frac{\sum_{m=1}^M c_m (z(\hat{x}_m) - \hat{z}_m)^2}{M-1}}$$

where $c_1 = c_M = 0.5$ and $c_m = 1, m = 2, \dots, M-1$. Note that the residual error of the L^1 spline fit ($RE = 0.0153$) is of the same magnitude as the other listed methods despite their fundamental difference in approximation metrics. More importantly, the L^1 spline fit has significantly smaller MAE than the other B-splines. This experiment not only proves the effectiveness of the proposed knot number heuristic method, but provides additional evidence that L^1 spline fits approximate data well in both L_1 and L_2 measures of error, which is an advantage over the B-spline fitting models.

6.3. Computational time

Although we did not implement the KLOM and KNHM algorithms to their most optimized efficiency, we test the computational time of them on larger data sets than those in Sections 6.1 and 6.2 to provide more information. The experiments are conducted on a laptop with Intel Core i7-6820HQ CPU at 2.70 GHz, 16 GB RAM and MATLAB R2015a. We use the 1000×1000 -point 1 meter-spaced terrain height data set for Baltimore (Lin et al., 2006) because in general shape-preserving approximation of the urban terrain data is a difficult problem. Take a row from the Baltimore data set and we have a test data set of 1000 points. We randomly select 10 rows to generate 10 test data sets in this way. One of the test data sets with a 100-knot L^1 spline fit is illustrated in Fig. 7.

To test KLOM, we set the number of knots to be 20, 40, 60, 80 and 100 for each test data set. The initial knots are equidistantly distributed. The average computational times and the average MAE over the 10 test data sets for each knot number setting are presented in Table 3. To test KNHM, we set the initial number of knots to be 50 and 100 for each test data set. The initial knots are equidistantly distributed. The average computational times and the average MAE over the 10 test data sets for each initial knot number setting are presented in Table 4. Results in both tables show that with more knots the computational time decreases and the MAE decreases. The bottleneck of both algorithms is the subgradient method which is a sub-routine of the augmented Lagrangian method. In general, subgradient methods may require a high number of iterations before a solution of good quality can be obtained. This observation also indicates the difficulty of the knot placement problem.

Table 4
Computational time of KNHM.

Initial number of knots	50	100
Average time (sec.)	91.9	202.2
Average MAE	2313.9	1299.7

7. Concluding remarks

This paper has addressed the important knot placement problem of L^1 spline fitting. We have formulated an optimization model for L^1 spline fits with free knots and have proposed an augmented Lagrangian method to optimize the knot locations. Despite the non-convexity of the problem, the proposed method can produce shape-preserving L^1 spline fits with reduced data approximation error. Furthermore, we have suggested a heuristic method for determining knot number and locations simultaneously. Results show that the heuristic method can adaptively place knots at proper locations. The experiment on the classic Titanium heat data reveals that data approximation using L^1 splines may produce better results than state-of-the-art least square B-splines. This research increases the flexibility of L^1 spline fits as a data approximating tool while requiring minimal input from the user.

This study provides preliminary but sufficient evidence that further investigation of the knot placement problem for L^1 splines may lead to significant advances in robust, shape-preserving and computationally efficient data approximation. The proposed methods and results are also a basis for bivariate and multivariate L^1 spline fits. Future development of global optimization methods will enhance the modeling capability of L^1 spline fits and more broadly, spline-based data models.

CRedit authorship contribution statement

Ziteng Wang: Conceptualization, Data curation, Formal analysis, Investigation, Methodology, Project administration, Resources, Software, Supervision, Validation, Visualization, Writing – original draft, Writing – review & editing. **Manfei Xie:** Data curation, Formal analysis, Investigation, Methodology, Resources, Software, Validation, Visualization, Writing – original draft.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgement

This research is supported by Northern Illinois University.

References

- Bazaraa, M.S., Sherali, H.D., Shetty, C.M., 2013. *Nonlinear Programming: Theory and Algorithms*, 3rd ed. John Wiley & Sons.
- Beliakov, G., 2004. Least squares splines with free knots: global optimization approach. *Appl. Math. Comput.* 149, 783–798.
- Brandt, C., Seidel, H.P., Hildebrandt, K., 2015. Optimal spline approximation via ℓ_0 -minimization. In: *Computer Graphics Forum*. Wiley Online Library, pp. 617–626.
- Bulatov, D., Lavery, J.E., 2010. Reconstruction and texturing of 3D urban terrain from uncalibrated monocular images using L_1 splines. *Photogramm. Eng. Remote Sens.* 76, 439–449. <https://doi.org/10.14358/PERS.76.4.439>.
- Camerini, P.M., Fratta, L., Maffioli, F., 1975. On improving relaxation methods by modified gradient techniques. In: *Nondifferentiable Optimization*. Springer, pp. 26–34.
- Chiu, N.C., Fang, S.C., Lavery, J.E., Lin, J.Y., Wang, Y., 2008. Approximating term structure of interest rates using cubic L_1 splines. *Eur. J. Oper. Res.* 184, 990–1004.
- De Boor, C., Rice, J.R., 1968. Least squares cubic spline approximation, II-variable knots. Technical Report. Purdue University.
- Dobrev, V., Guermont, J.L., Popov, B., 2010. Surface reconstruction and image enhancement via L^1 -minimization. *SIAM J. Sci. Comput.* 32, 1591–1616.
- Dung, V.T., Tjahjowidodo, T., 2017. A direct method to solve optimal knots of B-spline curves: an application for non-uniform B-spline curves fitting. *PLoS ONE* 12, e0173857.
- Gajny, L., Gibaru, O., Nyiri, E., 2014. $L_1 C^1$ polynomial spline approximation algorithms for large data sets. *Numer. Algorithms* 67, 807–826.
- Gálvez, A., Iglesias, A., 2011. Efficient particle swarm optimization approach for data fitting with free knot B-splines. *Comput. Aided Des.* 43, 1683–1692.
- Gálvez, A., Iglesias, A., Avila, A., Otero, C., Arias, R., Machado, C., 2015. Elitist clonal selection algorithm for optimal choice of free knots in b-spline data fitting. *Appl. Soft Comput.* 26, 90–106.
- Jin, Q., Lavery, J.E., Fang, S.C., 2010. Univariate cubic L_1 interpolating splines: analytical results for linearity, convexity and oscillation on 5-point windows. *Algorithms* 3, 276–293. <https://doi.org/10.3390/a3030276>.
- Jupp, D.L., 1978. Approximation to data by splines with free knots. *SIAM J. Numer. Anal.* 15, 328–343.
- Kang, H., Chen, F., Li, Y., Deng, J., Yang, Z., 2015. Knot calculation for spline fitting via sparse optimization. *Comput. Aided Des.* 58, 179–188.
- Lai, M.J., Weston, P., 2004. L_1 spline methods for scattered data interpolation and approximation. *Adv. Comput. Math.* 21, 293–315.
- Laube, P., Franz, M.O., Umlauf, G., 2018. Learnt knot placement in B-spline curve approximation using support vector machines. *Comput. Aided Geom. Des.* 62, 104–116.
- Lavery, J.E., 2000a. Shape-preserving, multiscale fitting of univariate data by cubic L_1 smoothing splines. *Comput. Aided Geom. Des.* 17, 715–727.

- Lavery, J.E., 2000b. Univariate cubic L_p splines and shape-preserving, multiscale interpolation by univariate cubic L_1 splines. *Comput. Aided Geom. Des.* 17, 319–336. [https://doi.org/10.1016/S0167-8396\(00\)00003-0](https://doi.org/10.1016/S0167-8396(00)00003-0).
- Lavery, J.E., 2001. Shape-preserving, multiscale interpolation by bi- and multivariate cubic L_1 splines. *Comput. Aided Geom. Des.* 18, 321–343. [https://doi.org/10.1016/S0167-8396\(01\)00034-6](https://doi.org/10.1016/S0167-8396(01)00034-6).
- Lavery, J.E., 2004. Shape-preserving approximation of multiscale univariate data by cubic L_1 spline fits. *Comput. Aided Geom. Des.* 21, 43–64. <https://doi.org/10.1016/j.cagd.2003.07.002>.
- Lavery, J.E., 2006. Shape-preserving, first-derivative-based parametric and nonparametric cubic spline curves. *Comput. Aided Geom. Des.* 23, 276–296. <https://doi.org/10.1016/j.cagd.2005.11.002>.
- Lavery, J.E., 2009. Shape-preserving univariate cubic and higher-degree splines with function-value-based and multistep minimization principles. *Comput. Aided Geom. Des.* 26, 1–16. <https://doi.org/10.1016/j.cagd.2008.01.004>.
- Li, W., Xu, S., Zhao, G., Goh, L.P., 2005. Adaptive knot placement in B-spline curve approximation. *Comput. Aided Des.* 37, 791–797.
- Lin, Y.M., Zhang, W., Fang, S.C., Wang, Y., Lavery, J.E., 2006. Computationally efficient models of urban and natural terrain by non-iterative domain decomposition for L_1 smoothing splines. In: *Proceedings of the 25th Army Science Conference*. Department of the Army, Washington, DC, USA.
- Luenberger, D.G., Ye, Y., 2015. *Linear and Nonlinear Programming*. Springer.
- Luo, J., Kang, H., Yang, Z., 2019. Knot calculation for spline fitting based on the unimodality property. *Comput. Aided Geom. Des.* 73, 54–69.
- Lyche, T., Mørken, K., 1988. A data-reduction strategy for splines with applications to the approximation of functions and data. *IMA J. Numer. Anal.* 8, 185–208.
- Nie, T., Wang, Z., Fang, S.C., Lavery, J.E., 2017. Convex shape preservation of cubic L^1 spline fits. *Ann. Data Sci.* 4, 123–147.
- Nyiri, E., Gibaru, O., Auquier, P., 2010. Nonlinear L_1C^1 interpolation: application to images. In: *International Conference on Curves and Surfaces*. Springer, pp. 515–526.
- Olabi, A., Bearee, R., Nyiri, E., Gibaru, O., 2010. Enhanced trajectory planning for machining with industrial six-axis robots. In: *2010 IEEE International Conference on Industrial Technology*. IEEE, pp. 500–506.
- Park, H., Lee, J.H., 2007. B-spline curve fitting based on adaptive curve refinement using dominant points. *Comput. Aided Des.* 39, 439–451.
- Plass, M., Stone, M., 1983. Curve-fitting with piecewise parametric cubics. In: *Proceedings of the 10th Annual Conference on Computer Graphics and Interactive Techniques*, Association for Computing Machinery, pp. 229–239.
- Schwetlick, H., Schütze, T., 1995. Least squares approximation by splines with free knots. *BIT Numer. Math.* 35, 361–384.
- Tjahjowidodo, T., Dung, V., Han, M., 2015. A fast non-uniform knots placement method for B-spline fitting. In: *2015 IEEE International Conference on Advanced Intelligent Mechatronics (AIM)*. IEEE, pp. 1490–1495.
- Ülker, E., Arslan, A., 2009. Automatic knot adjustment using an artificial immune system for B-spline curve approximation. *Inf. Sci.* 179, 1483–1494.
- Van Loock, W., Pipeleers, G., De Schutter, J., Swevers, J., 2011. A convex optimization approach to curve fitting with B-splines. *IFAC Proc.* 44, 2290–2295.
- Wang, Z., Fang, S.C., Lavery, J.E., 2015. On shape-preserving capability of cubic L^1 spline fits. *Comput. Aided Geom. Des.* 40, 59–75.
- Wang, Z., Lavery, J.E., Fang, S.C., 2014. Approximation of irregular geometric data by locally calculated univariate cubic L^1 spline fits. *Ann. Data Sci.* 1, 5–14. <https://doi.org/10.1007/s40745-014-0002-z>.
- Yeh, R., Nashed, Y.S., Peterka, T., Tricoche, X., 2020. Fast automatic knot placement method for accurate b-spline curve fitting. *Comput. Aided Des.* 128, 102905. <https://doi.org/10.1016/j.cad.2020.102905>.
- Yoshimoto, F., Harada, T., Yoshimoto, Y., 2003. Data fitting with a spline using a real-coded genetic algorithm. *Comput. Aided Des.* 35, 751–760. [https://doi.org/10.1016/S0010-4485\(03\)00006-X](https://doi.org/10.1016/S0010-4485(03)00006-X).
- Yoshimoto, F., Moriyama, M., Harada, T., 1999. Automatic knot placement by a genetic algorithm for data fitting with a spline. In: *Proceedings Shape Modeling International'99*. International Conference on Shape Modeling and Applications. IEEE, pp. 162–169.
- Yu, L., Jin, Q., Lavery, J.E., Fang, S.C., 2010. Univariate cubic L_1 interpolating splines: spline functional, window size and analysis-based algorithm. *Algorithms* 3, 311–328. <https://doi.org/10.3390/a3030311>.
- Yuan, Y., Chen, N., Zhou, S., 2013. Adaptive B-spline knot selection using multi-resolution basis set. *IJSE Trans.* 45, 1263–1277.